

# Data Sheet | Flyscreen Door

## T5/T6

### DESCRIPTION

Semi-assembled pleated flyscreen door for installation inside sliding side door openings of Volkswagen T5 (2009-2015) and Volkswagen T6/T6.1 (2015-2024) Caravelle & Multivan campervans. **Includes replacement entry step.**



### OPERATION

Manual step-less adjustment. Closing from right to left (as seen from the inside) for left-hand steered vehicles, optionally from right to left for right-hand steered vehicles.

### STANDARD DIMENSIONS (MM)

Top guider profile length	988
Bottom guider profile length	1,025
Overall height	1,343

### SPECIAL NOTE

Combine a flyscreen door with genuine UCS combi-blinds for a total insect screen solution

**Disclaimer | The specifications in this data sheet are for information purposes only and may be subject to change without prior notice. © Horrex 2024**

### MATERIAL SPECIFICATIONS

#### Top guider profile

Extruded aluminium 23.5 x 24.6 mm (WxH) in light grey (±RAL7047) or dark grey (± RAL7021) powder coated (conditions apply)

#### Pull bar

Extruded aluminium 50 x 17 mm (WxH) in light grey (±RAL7047) or dark grey (± RAL7021) powder coating (conditions apply)

#### Bottom guiding profile

Extruded anodized aluminium 31 x 22.5 mm (WxH)

#### Side panel (optional)

Black ABS panel, straight for customisation or pre-shaped, aligned with the bodywork and/or interior of the van, for effective protection against insects (conditions apply)

#### Corner pieces and caps

Colour coordinated injection moulded parts in PA6 and PA6.6

#### Insect screen mesh

Single pleat black polyester mesh 1.3 x 1.3 mm (mesh opening), optional FR in accordance with standard FMVSS/CMVSS 302 (conditions apply)

#### Entry step

Vacuum formed ABS Entry step 111.5 x 1,103.3 x 220 (HxWxD)

### INSTALLATION

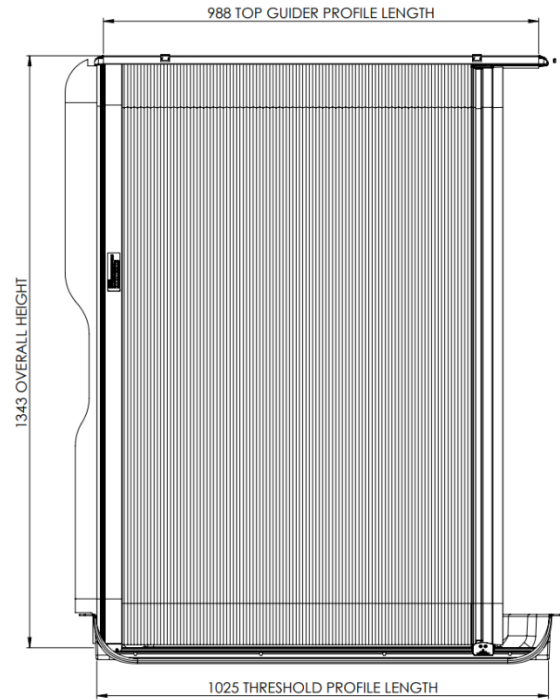
On-face fixation on the inside with 2 clips underneath the door rubber at the top and the replacement of the entry step. The required mounting space between door rubber and top cabinet is 27 mm and between sliding door and kitchen cabinet is 20 mm

### CLEANING

A soft damp cloth with mild detergent

### PACKAGING

Individually or bulk with mounting set

**PRE-SHAPED SIDE PANEL (optional)****DRAWING (MM)****SIDE PANEL FOR CUSTOMISATION  
(optional)**